


S5000C

SMART CARD PERSONALIZER

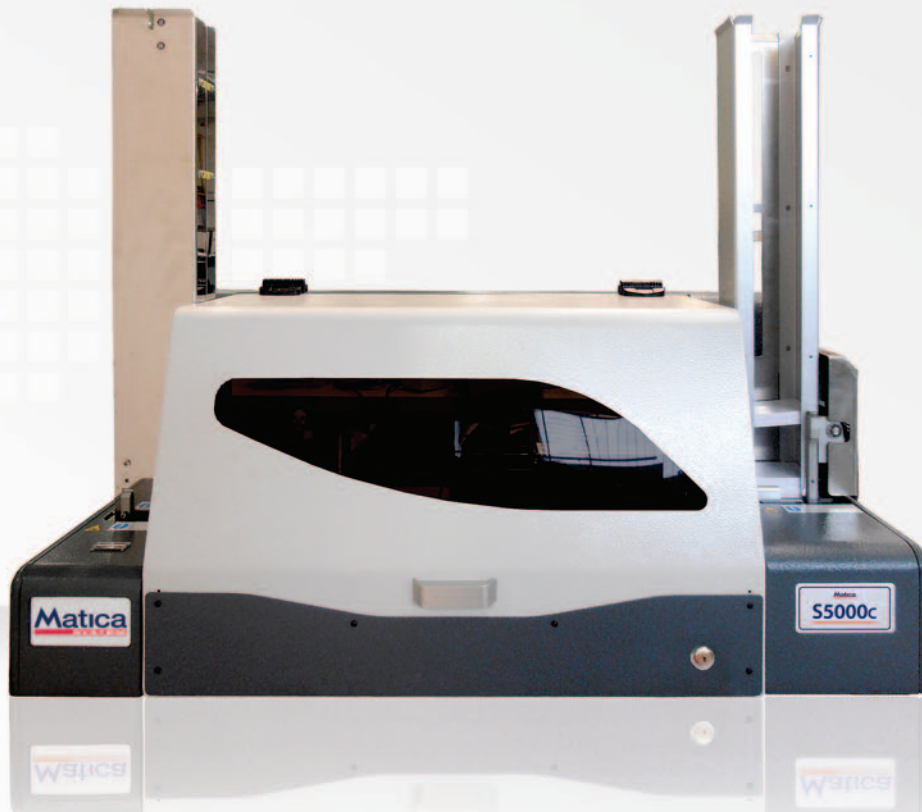

SMART SOLUTION FOR CARD ISSUANCE PROGRAMS

The affordable and cost-effective desktop unit dedicated to simultaneously personalize up to 10 smart cards, with reduced cycle time and high throughput, even when performing complex programming operations.

Used also as a complementary solution to the existing card issuance systems, that do not comprise the smart card personalization encoder, the S5000C is the ideal solution for financial, government, insurance and telecommunication card encoding.

TARGET MARKETS

- Financial
- Government
- Insurance
- Telecommunications



S5000C

SMART CARD PERSONALIZER

DESKTOP HIGH SPEED SMART CARD PERSONALIZATION

Forced to upgrade your high speed system with an expensive smart card encoding module? Not necessary so!

Card issuers who are faced with adding smart card encoding modules to handle the new demands for smart card programs need not spend enormous sums to upgrade their systems. Always looking to make card issuance affordable and cost effective, Matica has created the S5000C which encodes cards without the high cost of adding a module.

SMART CARD MODULE WITH 5 OR 10 PERSONALIZATION STATIONS

The S5000C is a newly developed and affordable desktop unit that allows users to simultaneously personalize up to 10 smart cards, thus offering similar productivity levels to that of many smart card modules of larger card issuance systems. The reduced cycle time allows the S5000C to maintain a high throughput even when performing complex programming operations, such as EMV and multi-application smart cards. The mechanism works as an "elevator" by which two 5-station smart card modules raise one station at the time until all 10 stations have been loaded, upon which each module descends to its initial position. At this point the first card, now fully personalized, is transferred to the vertical output hopper and replaced by a new card, and the process described above is repeated.

MAGNETIC STRIPE ENCODING AND READING CAPABILITY

An ISO standard magnetic stripe encoding and reading module (HiCo/LoCo, tracks 1, 2 and 3) makes it possible to perform both smart card and magnetic stripe encoding in a single step or, more importantly, to feed pre-personalized cards with magnetic stripe into the S5000C, which then reads the information encoded, identifies, collects and encodes the "smart card data" onto the chip. This unique feature of the S5000C, makes it ideal as a complementary unit to existing card issuance systems. Cards issuers can complete all traditional elements of card personalization (magnetic stripe encoding, embossing/indent, thermal printing, topping, etc.) with their existing systems, and then feed these pre-personalized cards into the S5000C to complete the smart card personalization process.

EMV CARD PERSONALIZATION

Matica cooperates with some of the largest smart card industry solution providers to offer complete EMV card personalization solutions. The MaticardPro Windows-based card production software provides user-friendly interface between the operator and the system.

TECHNICAL SPECIFICATIONS

Card handling

- Input hopper capacity: 600 cards
- Output hopper capacity: 600 cards
- Reject cards hopper
- Cards format: ISO Std. CR80

Card Personalization

- Multi-chip Smart Card Module:
 - 5 contact or 3 contactless stations with USB Smart Card Reader (PCSC Driver)
 - USB HUB

Options

- Magnetic stripe encoding: HiCo/LoCo – std. tracks 1, 2 & 3 (ISO/IEC 7811)
- Single Contact Encoding Station
- Single Contactless Encoding Station
- Second Multi-chip Smart Card Module:
 - 5 contact or 3 contactless stations with USB Smart Card Reader (PCSC Driver)

Communication Interface

- 1 serial and 1 or 2 USB ports (5 or 10 smart card stations)

Software

- MaticardPro Windows-based software included
- Diagnostic and setup software included

Other Features

- Key-lock security feature
- LCD display (40 x 2)
- Upgradeable firmware: via PC on Flash EPROM

Dimensions & Weight

- L x W x H: 84 x 60 x 35 cm
- Weight: 47 kg

Electrical Requirements

- Power supply: 100 to 240 VAC (+/- 10%); 50/60 Hz (+/- 3 Hz)

Matica
SYSTEM

Matica System S.p.a.

Via Guido Rossa 4/6

20037 Paderno Dugnano, Italy

Phone: + 39 02 922 72501

Email: info@maticasystem.com

Discover our high security identification solutions at www.edisecure.com

www.maticasystem.com

Data subject to change without notice. All trademarks stated are the property of their respective owners. S5000C/11.2012